


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.295	159.9
No. OF BOLTS		12	12
THREAD / THRO' HOLE		0.394	10.0
CROWN WHEEL SPIGOT DIA	D2	5.402	137.2
BEARING DIA	D3	3.502	89.0
BEARING DISTANCE	L1	4.508	114.5
SPIGOT LENGTH	L2	0.750	19.1
	L2/A	0.750	19.1
OVERALL LENGTH	L3	6.008	152.6
BEARING/CROWN WHEEL	L4	0.458	11.6
SPLINE BORE	D4	1.107	28.1
DRIVE SHAFT SPLINE:-			
No. OF TEETH		18	
PITCH		16/32	
TYPE		FLAT ROOT SIDE FIT	
PRESSURE ANGLE		30 DEG	

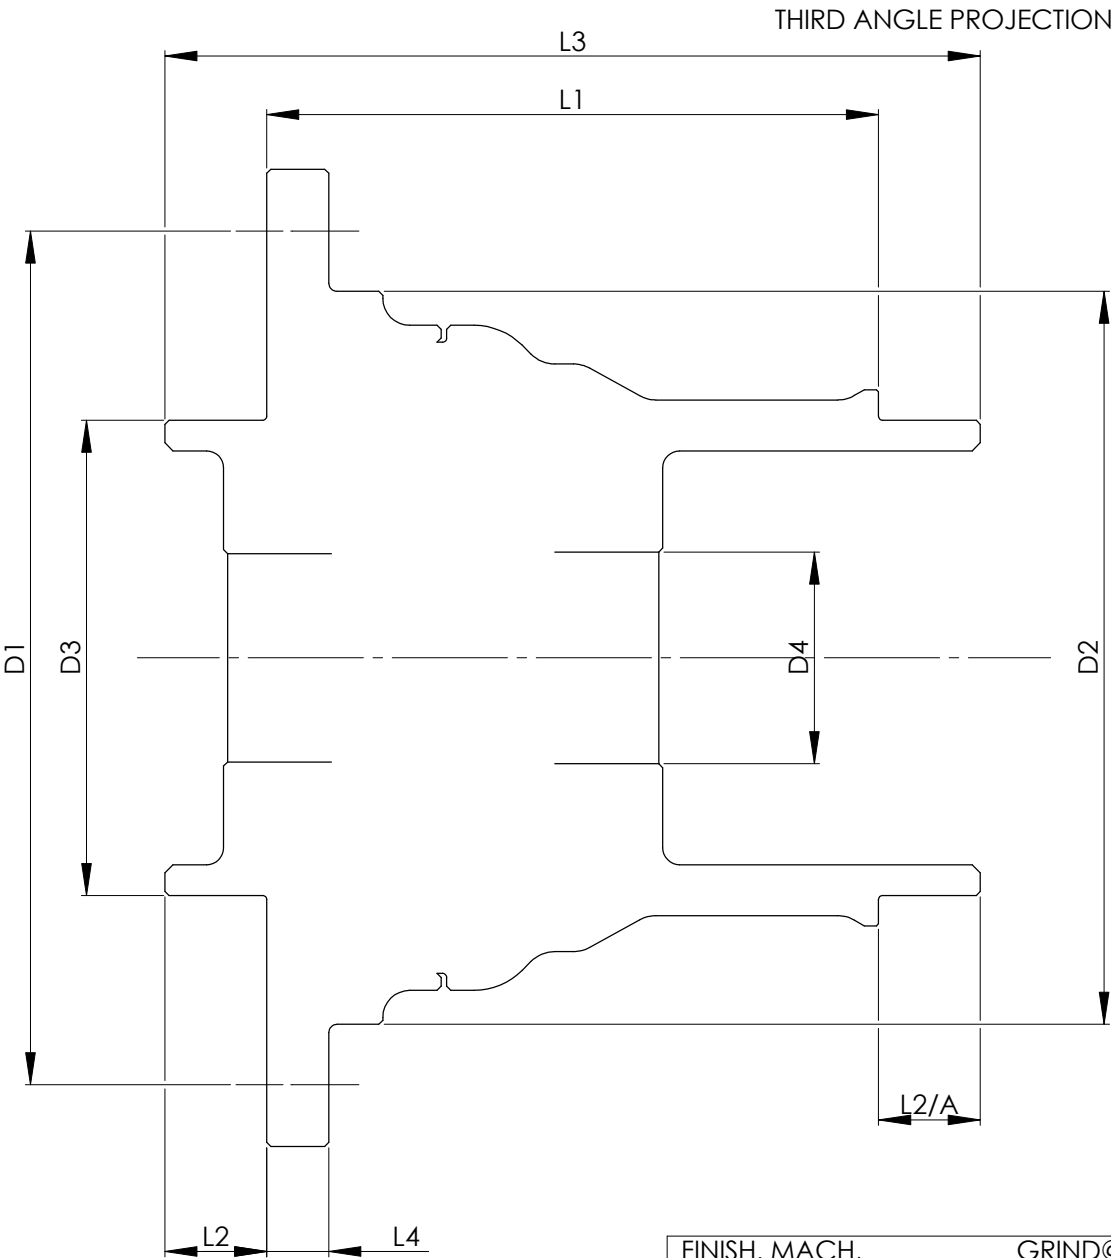

TITLE F.W.D. DIFF. DATA SHEET
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF15S

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T. QUARRE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 8.5.06	
DRAWN BY. J.P.D.	

Used In. VALDRES MOTOR &
BILSKADE TRANS. DIFF

SOLID WORKS