


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.020	152.9
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.490	12.4
CROWN WHEEL SPIGOT DIA	D2	4.8415	123.0
BEARING DIA	D3	1.7722	45.0
BEARING DISTANCE	L1	4.652	118.2
SPIGOT LENGTH	L2	0.824	20.9
	L2/A	0.824	20.9
OVERALL LENGTH	L3	6.300	160.0
BEARING/CROWN WHEEL	L4	1.631	41.4
BORE	D4	1.262	32.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		29	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

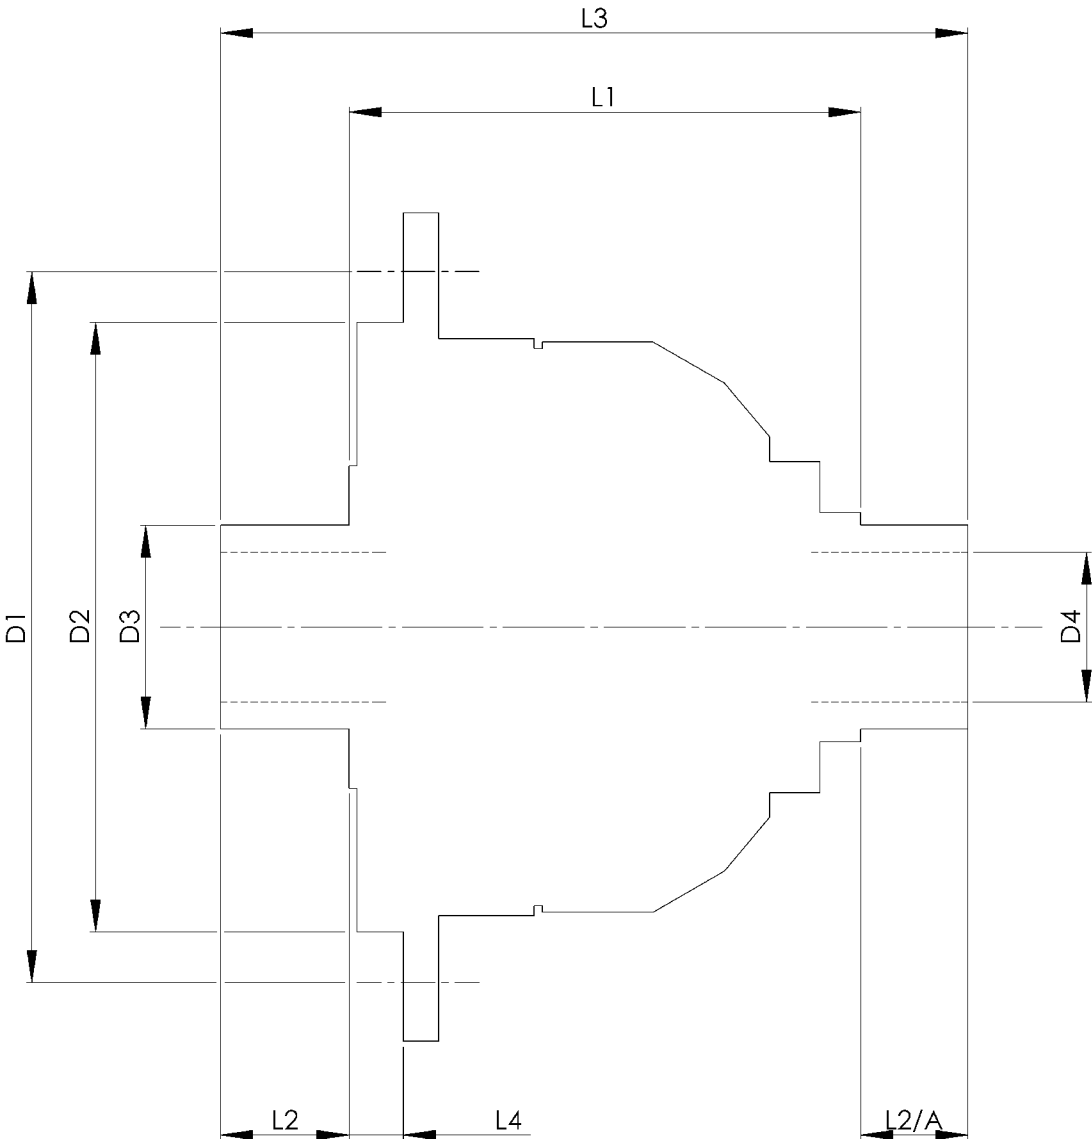

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH14B

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. $\pm 1/64"$	
DEC. $\pm 0.005"$	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 18.5.05	
DRAWN BY. M.L.M.	
Used In.	HYUNDAI TIBURON COUPE 6 SPEED