


		INCH	MM
CROWN WHEEL BOLT PCD 1	D1/A	4.285	108.8
CROWN WHEEL BOLT PCD 2	D1/B	4.010	101.9
No. OF BOLTS		8	8
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	4.9599	126.0
BEARING DIA	D3	1.5753	40.0
BEARING DISTANCE	L1	4.0395	102.6
SPIGOT LENGTH	L2	0	0
	L2/A	0.520	13.2
OVERALL LENGTH	L3	4.5596	115.8
BEARING/CROWN WHEEL	L4	0	0
BORE	D4	1.2241	31.1
SUNWHEEL SPIGOT DIA	D5	1.573	39.9

DRIVE SHAFT SPLINE:-

No. OF TEETH	12	
PITCH	TBE	
TYPE	TBE	TBE
PRESSURE ANGLE	TBE	

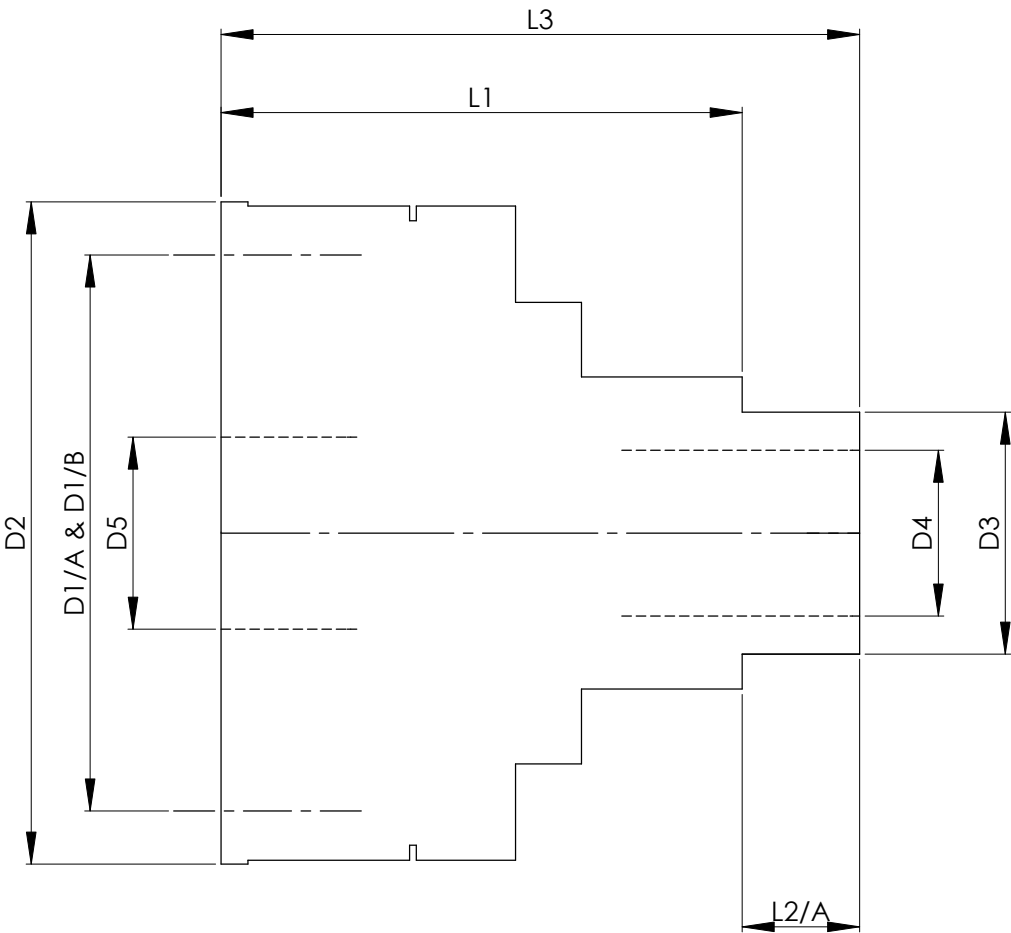

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF13H

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
R.T. QUARRE ENGINEERING LTD.
AND MAY NOT BE USED COPIED OR EXHIBITED
WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 16.5.07	
DRAWN BY. H.R.	
Used In.	CITREON SM