


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.092	104
No. OF BOLTS		10	10
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	4.8820	124.0
BEARING DIA	D3	1.7722	45.3
BEARING DISTANCE	L1	3.283	83.4
SPIGOT LENGTH	L2	0	0
	L2/A	0.732	18.6
OVERALL LENGTH	L3	4.015	102.0
BEARING/CROWN WHEEL	L4	0	0
BORE	D4	1.2604	32.0
	D5	1.282	32.6
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

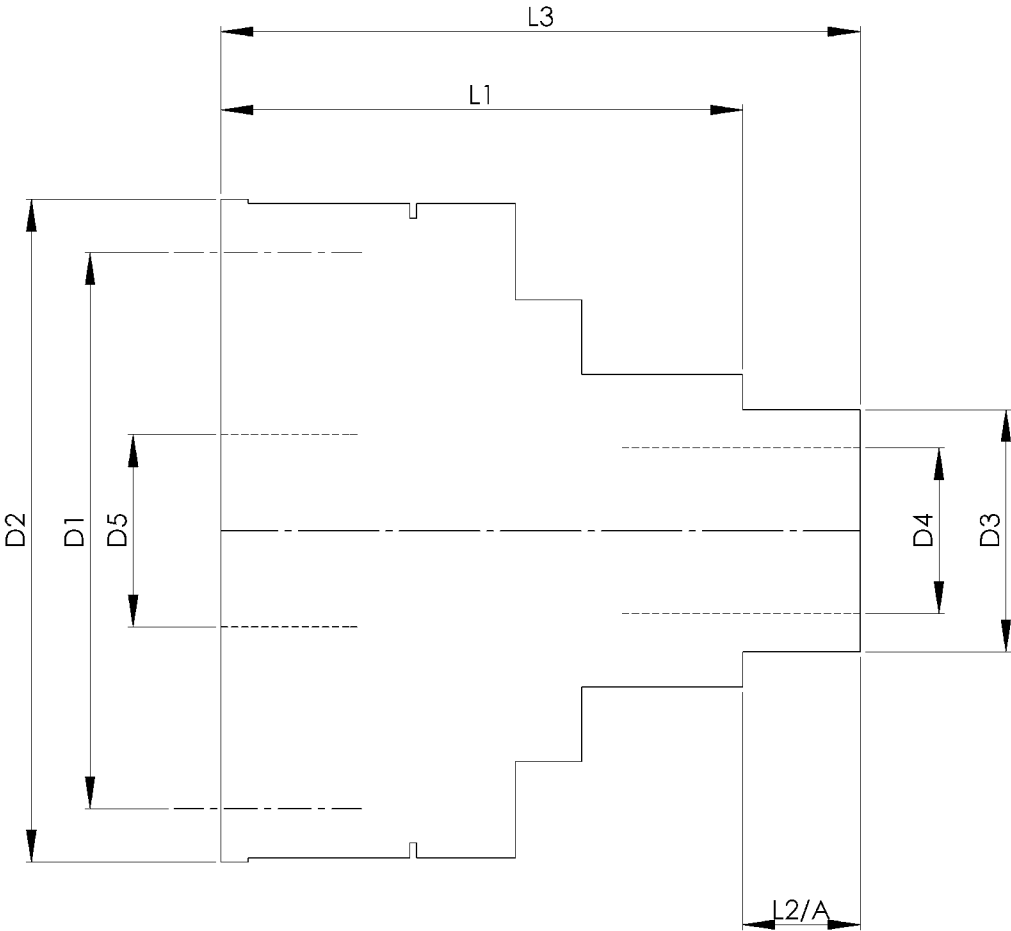

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF5M

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 20.5.05	
DRAWN BY. M.L.M.	
Used In.	RENAULT 30/Alpine (UN1 G/B)