


		INCH	MM
CROWN WHEEL BOLT PCD	D1	4.922	125
No. OF BOLTS		6	6
THREAD / THRO' HOLE		0.375	9.5
CROWN WHEEL SPIGOT DIA	D2	3.839	97.5
BEARING DIA	D3	1.376	34.9
BEARING DISTANCE	L1	3.742	95.0
SPIGOT LENGTH	L2	0.800	20.3
	L2/A	0.800	20.3
OVERALL LENGTH	L3	5.340	135.6
BEARING/CROWN WHEEL	L4	0.687	17.4
BORE	D4	1.022	25.9
DRIVE SHAFT SPLINE:-			
No. OF TEETH		22 or 16	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

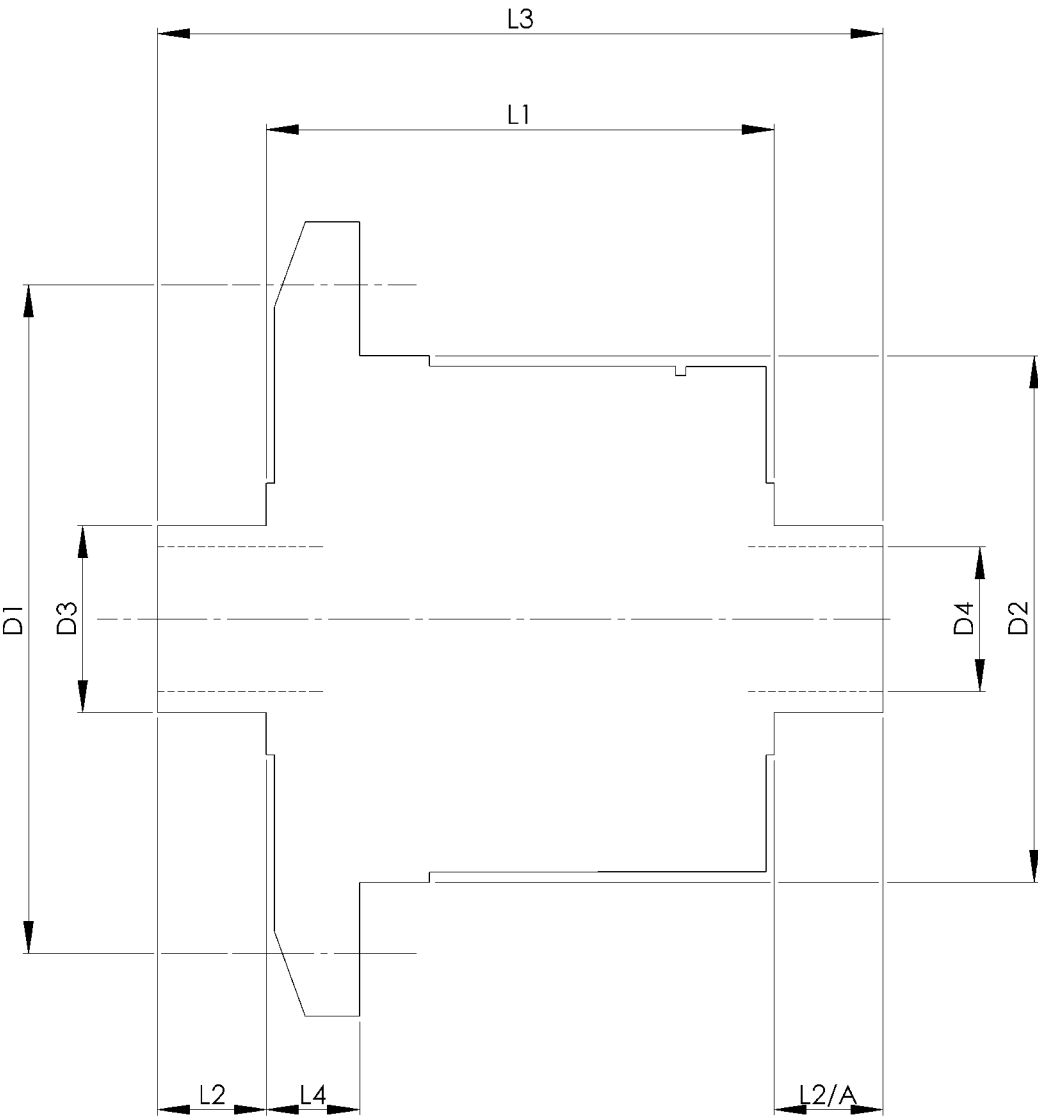

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF5Z

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 16.5.05	
DRAWN BY. M.L.M.	
Used In.	ENGLISH DIFF